


Polymer Systems Technology Limited

UK & Ireland Distributor



© 2011 - Polymer Systems Technology Limited TM
Unit 2. Network 4. Cressex Business Park,
Lincoln Road, High Wycombe, Bucks. HP12 3RF
Phone +44 (0) 1494 446610
Fax: +44 (0) 1494 528611
Web: <http://www.siliconepolymers.co.uk>
Email: sales@silicone-polymers.co.uk

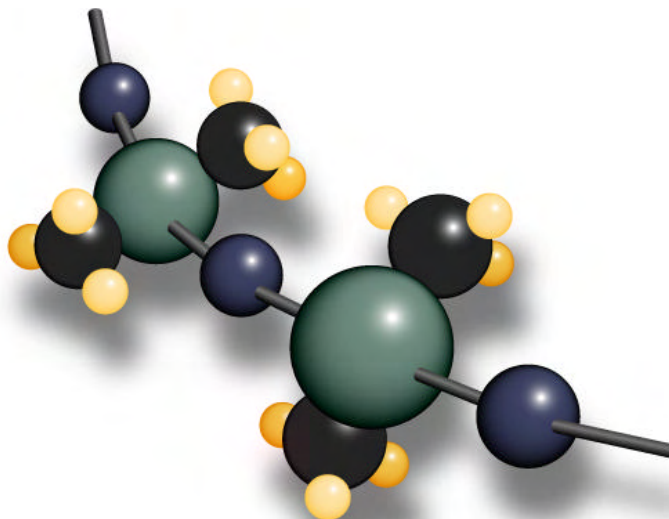

MED4-4515 & MED4-4516

Silicone Elastomers



Creative Partners in a Material World

NuSil Technology
1050 Cindy Lane • Carpinteria, CA 93013
805/684-8780 • 805/566-9905 Fax
www.nusil.com

An ISO 9001 Certified Company

Product Profile

Description

- Pre-catalyzed, high consistency elastomers
- MED4-4515 has a medium durometer and MED4-4516 has a high durometer

Applications

- For a wide variety of fabrication techniques including: molding, calendaring, and extruding

Typical Properties	MED4-4515		MED4-4516		ASTM	NT-TM
	Result	Metric Conv.	Result	Metric Conv.		
Uncured:						
Appearance	Translucent gray	-	Translucent gray	-	D2090	002
Plasticity	90 mils	2.3 mm	120 mils	3.0 mm	D926	058
Cured: 5 minutes @ 116°C						
Specific Gravity	1.15	-	1.21	-	D792	003
Post Cured: 2 hours @ 249°C, stabilize for 3 hours minimum						
Durometer, Type A	50	-	70	-	D2240	006
Tensile Strength	1,500 psi	10.3 MPa	1,350 psi	9.3 MPa	D412, D882	007
Elongation	450%	-	400%	-	D412, D882	007
Tear Strength	100 ppi	17.6 kN/m	125 ppi	22.0 kN/m	D624	009
Stress @ 200%	450 psi	3.1 MPa	600 psi	4.1 MPa	D412, D882	028

Instructions for Use

The unvulcanized elastomer is a soft, translucent material that typically will crepe-harden with time. This phenomenon is reversible by “re-softening” the material on a two-roll mill. In general, freshly softened elastomers have better processing characteristics; therefore, milling to a smooth consistency before use is advised regardless of the elastomer’s age. Minimize heating the material when milling to prevent premature partial curing.

Obtain intermediate hardness and other physical properties by thoroughly cross-blending various ratios of the two elastomers on a two-roll compounding mill. Also accomplish addition of other fillers and pigments on the mill.

Caution

Avoid foreign organic material absorption through contact or vapor and contamination from handling or processing equipment. During vulcanization, oven-curing, and post-curing, vapors containing polychlorinated biphenyl (PCB), and other residual volatile byproducts of vulcanization may be released in small amounts, which may be harmful. Work areas must be well ventilated, and workers should avoid inhalation of vapors. Review the Material Safety Data Sheets for specific information.

Molding

Mold by standard techniques of compression, transfer or injection molding. Molding cycle times depend on the mold temperature and cross-sectional thickness of the part. It is best to use highly polished, chrome-plated or stainless steel molds for these operations. Other polished metals will normally require release agents to prevent sticking. If using release agents, clean the parts prior to use.

Packaging

1 Pound Unit (450 g)
5 Pound Unit (2.27 kg)
25 Pound Unit (11.38 kg)

Warranty

6 Months

Calendering

Calender the elastomer into sheeting with or without reinforcement. Make sheeting by calendering onto a laminate such as Mylar or polyethylene for vulcanized and unvulcanized sheeting, respectively. If using Mylar, strip off the Mylar after vulcanization while the sheet is still hot. If using polyethylene, strip off the polyethylene before vulcanization. Long lengths of Mylar laminated sheeting can be calendered on a core and vulcanized in a hot air oven or steam autoclaved.

Extrusion

Extrude the elastomer through an unheated die to make rod, tubing and coated wire. Accomplish vulcanization with this fabricating technique by passing the extrusion through a horizontal or vertical heated chamber. The residence time in the chamber varies with the size of the extrusion. For maximum uniformity, re-soften the elastomer on a two-roll mill the same day it is extruded.

Post-curing

The peroxide vulcanized elastomer contains 2,4-dichlorobenzoyl peroxide. The post-cure serves two purposes: post-curing removes the volatile components and other residuals generated from the decomposition of the peroxide during vulcanization, and post-curing stabilizes and enhances the physical properties of the elastomers.

Accomplish post-curing by heating the vulcanized material in a hot air circulating oven to a predetermined temperature for the required length of time. The oven must have an exhaust system of sufficient capacity to prevent volatiles from reaching an explosive level. The exhaust system should be vented so as to prevent worker exposure. The time required for post-curing at a given temperature depends upon the rate at which the volatiles can escape from the elastomer, which in turn depends upon the thickness of the part, the exposed surface area and the oven loading.

FDA Master Access File

A Master Access File for MED4-4515 and MED4-4516 have been filed with the U.S. Food and Drug Administration. Customers interested in authorization to reference the Master Access File must contact NuSil Technology.

Warnings About Product Safety

NuSil Technology believes the information and the data contained herein are accurate and reliable. However, the user is responsible to determine the material's suitability and safety of use. NuSil Technology cannot know each application's specific requirements and hereby notifies the user that it has not tested or determined this material's suitability or safety for use in any application. The user is responsible to adequately test and determine the safety and suitability for their application and NuSil Technology makes no warranty concerning fitness for any use or purpose. NuSil Technology has completed no testing to establish safety of use in any medical application.

NuSil Technology has tested this material only to determine if the product meets the applicable specifications. (Please contact NuSil Technology for assistance and recommendations when establishing specifications.) When considering the use of NuSil Technology products in a particular application, review the latest Material Safety Data Sheet and contact NuSil Technology with any questions about product safety information.

Do not use any chemical in a food, drug, cosmetic, or medical application or process until having determined the safety and legality of the use. The user is responsible to meet the requirements of the U.S. Food and Drug Administration (FDA) and any other regulatory agencies. Before handling any other materials mentioned in the text, obtain available product safety information and take the necessary steps to ensure safety of use.

Specifications

Do not use the typical properties shown in this technical profile as a basis for preparing specifications. Please contact NuSil Technology for assistance and recommendations in establishing particular specifications.

Patent Warning

NuSil Technology disclaims any expressed or implied warranty against the infringement of any patent. NuSil Technology does not warrant the use or sale of the products described herein will not infringe the claims of any United States' or other country's patents covering the product itself, its use in combination with other products or its use in the operation of any process.

Warranty Information

NuSil Technology's warranty period is 6 months from the date of shipment when stored below 40°C in original unopened containers. Unless NuSil Technology provides a specific written warranty of fitness for a particular use, NuSil Technology's sole warranty is that the product will meet NuSil Technology's then current specification. NuSil Technology specifically disclaims any other expressed or implied warranty, including warranties of merchantability and fitness for use. The exclusive remedy and NuSil Technology's sole liability for breach of warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. NuSil Technology expressly disclaims any liability for incidental or consequential damages.